


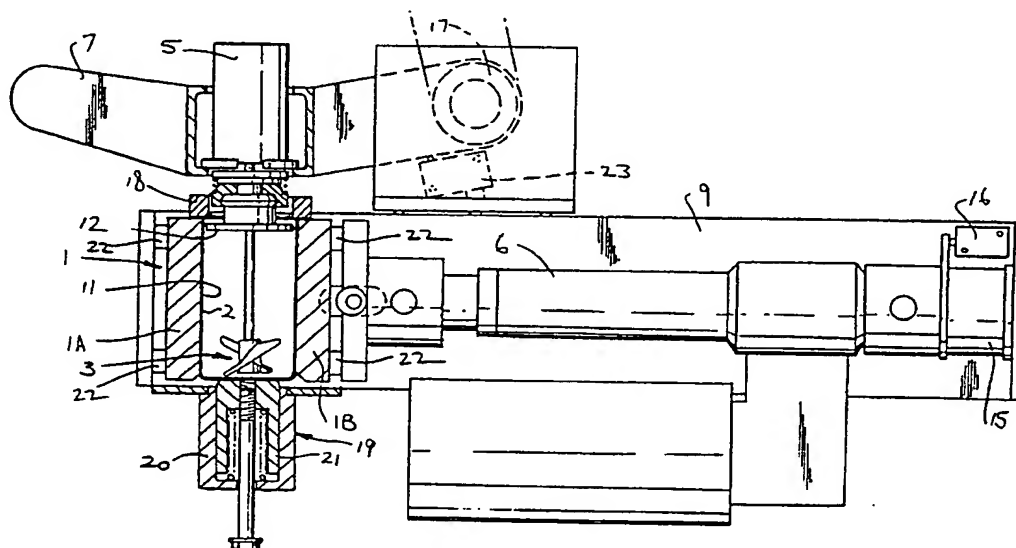

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁴ : G01N 11/14, A01C 1/02	A1	(11) International Publication Number: WO 87/01198 (43) International Publication Date: 26 February 1987 (26.02.87)
(21) International Application Number: PCT/AU86/00238 (22) International Filing Date: 18 August 1986 (18.08.86) (31) Priority Application Numbers: PH 2013 PH 4578 (32) Priority Dates: 19 August 1985 (19.08.85) 13 February 1986 (13.02.86) (33) Priority Country: AU (71) Applicants (for all designated States except US): COMMONWEALTH SCIENTIFIC & INDUSTRIAL RESEARCH ORGANIZATION [AU/AU]; Limestone Avenue, Campbell, ACT 2601 (AU). THE BREAD RESEARCH INSTITUTE OF AUSTRALIA LIMITED [AU/AU]; Epping Road, North Ryde, NSW 2113 (AU). (72) Inventors; and (75) Inventors/Applicants (for US only) : BOOTH, Rodney, Ian [AU/AU]; 18 Bungan Head Road, Newport, NSW 2106 (AU). EDWARDS, David, William [AU/AU]; 15 Griffiths Street, Fairlight, NSW 2094 (AU). WRIGLEY, Colin, Walter [AU/AU];		2 Duncan Place, Epping, NSW 2121 (AU). ORTH, Robert, Alexander [AU/AU]; 14 Inala Place, North Narrabeen, NSW 2101 (AU). (74) Agent: PHILLIPS ORMONDE & FITZPATRICK; 367 Collins Street, Melbourne, VIC 3000 (AU). (81) Designated States: DE (European patent), FR (European patent), GB (European patent), JP, SE (European patent), US. Published <i>With international search report.</i>
(54) Title: METHOD AND APPARATUS FOR THE DETERMINATION OF VISCOSITY		

**(57) Abstract**

A method for measuring the viscosity of liquids including homogeneously mixed suspensions at known temperatures which comprises rapidly adjusting the temperature of the said liquid, stirring said liquid by rotating a stirring means (3) within said liquid at a measured speed and measuring the power consumed by rotating said stirring means at said speed. The invention also includes apparatus for performing the method which comprises a vessel (2), a heat transfer means (1) adapted to accommodate said vessel and capable of rapidly adjusting the temperature of its contents, a stirring means (3) adapted to be positioned within said vessel, a motor (5) for driving said stirring means, a speed controller for controlling the speed of the stirring means and power consumption measurement means for measuring the power consumption of the motor at any given time.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GA	Gabon	MR	Mauritania
AU	Australia	GB	United Kingdom	MW	Malawi
BB	Barbados	HU	Hungary	NL	Netherlands
BE	Belgium	IT	Italy	NO	Norway
BG	Bulgaria	JP	Japan	RO	Romania
BR	Brazil	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	LI	Liechtenstein	SN	Senegal
CH	Switzerland	LK	Sri Lanka	SU	Soviet Union
CM	Cameroon	LU	Luxembourg	TD	Chad
DE	Germany, Federal Republic of	MC	Monaco	TG	Togo
DK	Denmark	MG	Madagascar	US	United States of America
FI	Finland	ML	Mali		
FR	France				

METHOD AND APPARATUS FOR THE DETERMINATION OF VISCOSITY

The present invention relates to a method for measuring the viscosity of fluids and suspensions at varying temperatures and to equipment for carrying out the method.

Whilst not limited to such application the present invention is particularly suitable for determining the level of sprouting or germination in cereal grains and derived cereal products. Other applications envisaged include quality control in the food and polymer industries. The term "Fluid" as used throughout this specification is intended to include homogeneously mixed suspensions.

The suitability of cereal grain for making bread and other foodstuffs is affected by the degree of sprouting or germination of the grain before harvest. Natural biological processes connected with the sprouting of cereal crops result in the production of various substances, of which the enzyme amylase has the most notable influence on cereal quality. Amylase reacts with cereal starches causing them to be broken down at a rate which is dependent on amylase level and on temperature. Thus, it is possible to make a reasonably accurate estimate of sprouting activity in a cereal by monitoring the viscosity of an aqueous paste of a sample while it is heated under controlled conditions.

A well-known test which is based on the viscosity change in an aqueous cereal paste during heating is the Falling Number Test, and this involves measuring the time taken for a plunger to fall under gravity through a heated sample.

In the past the Falling Number Test has been performed using bulky equipment and thorough washing of both plunger and vessel has been required following every test.

SUBSTITUTE SHEET



This process has been slow and has required the attendance of skilled personnel.

The present invention offers a test which is relatively quick, cheap and moreover, readily adapted for substantially automatic operation thereby avoiding a need for skilled personnel or back up laboratory facilities.

According to the present invention there is provided a method for measuring the viscosity of a liquid (as hereinbefore defined) at known temperatures which comprises:

- (a) rapidly adjusting the temperature of the said liquid;
- (b) stirring said liquid by rotating a stirring means within said liquid at a measured speed; and
- (c) measuring the power consumed by rotating said stirring means at said speed.

According to another aspect of this invention there is provided a method for determining the degree of sprouting in cereals (which term is to be understood as embracing cereal grain and products) which comprises:

- (a) preparing a cereal/water mixture of known proportions;
- (b) rapidly adjusting the temperature of said mixture;
- (c) stirring said mixture by rotating a stirring means at a measured speed; and
- (d) measuring the power consumed by rotating said stirring means at said measured speed at a measured period of time or series of time after the commencement of said temperature adjustment.

When used to determine the level of sprouting or germination in cereal grains and derived cereal products the present invention, as with the Falling Number Test, is based

largely on the reaction of amylase with starches, but in this case viscosity is indicated by resistance to the rotation of a stirring means in a heated aqueous paste. As the temperature of the mixture increases the starch content of the cereal gelatinizes thus making the mixture more viscous. The activity rate of the amylase rises, attacking the starch, and thus operates to reduce the viscosity of the mixture. These two competing effects create, after a measured time, a paste of a certain viscosity.

It is preferable that the said temperature adjustment and said stirring are commenced substantially simultaneously. As the viscosity of the liquid is related to the temperature of the liquid and the power consumed in rotating the stirring means at a particular speed, viscosity measurements can be commenced almost immediately. It is also preferable that the liquid be retained in a vessel which is brought into contact with a heat transfer means. Most preferably the vessel is clamped within the heat transfer means. Such clamping should be of sufficient strength to slightly deform the walls of the vessel so that they substantially conform to the face of the heat transfer means. In this way it is possible to remove any air gap which may be present between the vessel and the heat transfer means due to the manufacturing tolerances of these components. Such steps enhance the speed at which this method may be carried out.

The heat transfer means may be of any of a number of forms but preferably it is a metallic block. Preferably, the metallic block is axially split into two sections which are adapted to be brought into contact with the vessel. If the liquid being tested is a cereal/water mixture initially it may

be necessary to rotate the stirring means relatively rapidly to promote homogeneity. The rotation speed of the stirring means may then be reduced, maintained constant by, say, electronic means, and at a known time after the time of temperature adjustment the power being consumed by the motor can be measured.

By way of example the degree of sprouting in a particular cereal may be ascertained by preparing a cereal/water paste of about 25% w/v composition by adding a sample of the cereal (preferably in the form of fine particles) to water at a predetermined temperature in a vessel in clamped contact with a heat transfer means. The degree of sprouting may be derived by relating the power-consumption reading for any particular stirrer rotation speed to tables of readings obtained from testing of control samples, or the equipment may, for example, incorporate circuitry to give a direct read-out of sprouting or some other convenient indicator of sample quality.

For increased accuracy it may be desirable to take power consumption measurements at a number of fixed times for comparison with control values. Study of the power consumption curve over a period of time from the commencement of heating may also yield useful information. For example, the whole curve profile may yield a more accurate guide to the Falling Number of the cereal being tested or the properties of the starch or other component of the sample in relation to the suitability for processing.

It will be clear to those skilled in the art that suitable values for parameters such as mixture starting temperatures, heating rates, stirring rates and power

consumption measurement times will vary according to the cereal or other substance being tested, and the dimensions of the vessel and associated stirrer. By way of example only, Table I illustrates parameters with which it has been possible to estimate the degree of sprouting to a precision of better than 4% co-efficient of variance using 30 ml samples of a variety of cereals in a heating vessel of 3.8 cm diameter fitted with an irregular-shaped paddle 0.7 deep and 3.2 cm overall width.

TABLE I

Cereal	Particle Size	Sample Composition % w/v	Heating Block Temp ^o C	Stirring rate for power consump- tion measure- ment (rpm)	Time of power consump- tion measure- ment (min)
Wheat	700 um	24	88	300	2
Wheat	700 um	19	95	300	2
Barley	700 um	24	88	300	1.5

* Heat was provided by a 600 watt element wound around the heating chamber.

** All samples were initially stirred at 1100 rpm for 15 seconds before reducing the stirrer speed to a constant level at which power consumption was

measured.

According to this invention there is also provided an apparatus for measuring the viscosity of a liquid (as hereinbefore defined) which comprises:

- (a) a vessel;
- (b) a heat transfer means adapted to accommodate said vessel and capable of rapidly adjusting the temperature of its contents;
- (c) a stirring means adapted to be positioned within said vessel;
- (d) a motor suitable to drive said stirring means;
- (e) a speed controller for controlling the speed of the stirring means; and
- (f) power consumption measurement means for measuring the power consumption of the motor at any given time.

Preferably the motor used to drive the stirrer is an electric motor. The vessel may be made of any suitable material, preferably a heat conductive material and is preferably of a disposal type in order that the vessel does not require cleaning after each test. Most preferably a thin walled (approximately 0.3 mm) aluminium canister is used.

The heat transfer means is preferably a metallic block. Such heating chamber is adapted to accommodate the reaction vessel and preferably is clamped around the reaction vessel in order to achieve a constant heating rate. The heat transfer means may be made out of any heat conductive material and preferably comprises a solid copper or aluminium block. In one embodiment of this invention the heating chamber is further split along an axis (preferably the central axis) and

mounted so that one section is fixed and the other portion is free to move. Pressure applying means may further be provided in order to provide a sufficient force to cause the two sections of the heating chamber to be pressed together. Such pressure applying means may be a mechanical actuator attached between the moveable portion of the heating chamber and some other rigidly fixed body such as a retaining framework.

Preferably the pressure applying means is an electrically or mechanically driven mechanism which is automatically activated upon the commencement of the rotation of said stirring means.

Where the heating chamber does comprise two portions a lever system may also be provided for either manual or automatic use to separate the two portions of the heating chamber so as to allow the insertion of the reaction vessel into place. The motor is preferably connected to the stirrer by a coupling so that it may be detached from the stirrer. In a preferred form the stirrer is provided with pins located at either side of the top of the stirrer which are adapted to couple with helical slots located to a fixture at the end of the motor shaft. When the stirrer is coupled to the motor in this way in operation the stirrer top is caused to automatically rise slightly and thus clear the rim of the vessel and thereby remove any unwanted frictional factors.

As stated it is important that the equipment provide means for driving the stirrer at a known speed. Accurate speed control of the motor can be achieved through the use of electronics. Depending on the agitation of the mixture in the vessel by the stirrer, more or less heat will be conducted into the mixture. Preferably, the motor speed should be

controlled to better than +1%.

Similarly the temperature of the heating chamber should be accurately determinable and controllable for tests of different grains or liquids.

Another feature which is provided in a preferred embodiment of this invention is the facility to accurately time the initiation of the heating effect. As the heat transfer means transmits negligible heat to the vessel prior to the clamping action it is the clamping action which is preferably used to trigger the test cycle.

In this way the instrument operation is not affected in any way by operator inexperience or facility. Where a lever system is provided a microswitch can be used to this effect attached to the lever system and monitored by a microprocessor - the operation of the microswitch initiating a test cycle.

The equipment of this invention may therefore also be provided with instrument electronics comprising some or all of the following sub units:

(a) Speed controller - such controller controls the motor speed - preferably for testing sprouting damage the stir speed is 800 r.p.m. whereas the measure speed is preferably 200 r.p.m.

(b) Temperature controller - such controller controls the temperature of said chamber. Preferably this is variable from between 25°C and 100°C for testing of starch properties and for testing wheat for sprouting damage is most preferably set at approximately 92°C.

(c) Analog to Digital convertor - Where an electric motor is used the motor current is usually in the range of 0 to 0.2

Amperes, depending on the viscosity of the test mixture. This current may be converted to a digital number by an analog to digital convertor and further converted by a look up table is generated empirically to yield a display result proportional to motor power and adjusted to correlate with other known and accepted indexes of sprout damage. The look up table closely models a parabolic relationship of the form:

$$x = 500 (10 i^2 + 3 i)$$

where i - motor current and x = displayed result.

(d) Display - The result may be displayed as a three digit number in the range 0-500 on a Light Emitting Diode digital display.

In the operation of the preferred method a weighed, ground wheatmeal or starch sample is placed in the vessel with a measured quantity of water. The motor is positioned over the vessel and is connected to the stirrer. The heat transfer means is brought into contact with the vessel simultaneously with the initiation of the rotation of the stirring means and heat is conducted into the sample through the walls of the reaction vessel. This causes the starch to gelatinize. The motor is first set to operate at a fast, or mix, speed to suspend the particles of the mixture and is then slowed to a measuring speed at which time the power being consumed by the motor is measured. A preferred embodiment of the equipment provided by the present invention is hereafter described with reference to the accompanying drawings in which:

Figure 1 is side elevation of the mechanical assembly of an apparatus made in accordance with the invention, partially sectioned.

Figure 2 is a perspective view of an apparatus made

in accordance with the invention.

Figure 3 is a perspective view of a stirring paddle used in the apparatus of the invention.

A heating chamber 1 is formed from a solid metal block fitted with suitable electrical heating elements (not shown) and is dimensioned approximately 70x65x65 mm.

This heating chamber is axially split into two portions. The first half 1A is fixed. The second half is moveable. The fixed portion 1A and moveable portion 1B are shaped such that when they are pressed together there is provided a cylindrical recess 11. Attached to the moveable portion 1(B) is a mechanical actuator 6. Mounting of the blocks is achieved by insulating supports 22. The actuator 6 coacts against the end wall of the framework 9 at its remote end via a rubber spring 15. Force applied by the mechanical actuator 6 is controlled by compression of the rubber spring 15 interrupting (via a microswitch 16) the current to the actuator 6. Preferably mechanical actuator 6 applies a force of approximately 1500 Newtons on the heating chamber 1.

The cylindrical recess 11 is of a diameter which when the two halves of the heating chamber are brought together the reaction vessel 2 is forced to conform to the walls of the recess 11, and contact is obtained substantially over the whole area of the sides of the reaction vessel 2. The reaction vessel 2 is a thin walled (0.3 mm) aluminium canister annealed to improve conformability.

A rotatable stirrer 3 is provided which comprises a stem 3A and paddle 3B. The stirrer 3 is adapted to be received into the reaction vessel 2. At the top of the stirrer 3 there is provided a plate 12 and coupling pins 13.

An electric motor 5 is positioned above the reaction vessel 2 and is connected a helical coupling (not shown). A lever 7 is positioned to pivot on bearings 17 which also carries motor 5. When lever 7 is brought forward and down motor 5 is accurately positioned over the central axis of the reaction vessel 2.

Also connected to lever 7 is an annular shaped buffer ring 18 fabricated from non heat conductive material such as nylon. The buffer ring 18 pushes the reaction vessel down into the cylindrical recess 11 against the pressure of the ejection assembly 19. The ejection assembly is comprised of body 20 and spring loaded plunger 21.

The heating chamber 1 and mechanical actuator 6 are mounted within framework 9. Electric motor 5 is electrically connected to case 10 which contains electronic components which cannot be seen in the figures. The electronic components contained in case 10 include a microprocessor which controls the following sub units:

- (a) a speed controller which controls the speed of the electric motor;
- (b) a temperature controller which enables control of the heating chamber and
- (c) an analog to digital convertor which converts the current utilized by the motor to a digital number and further converted by a look up table held in memory to give a test result.

A digital display 8 is provided at the front of case 10 and is of the light emitting diode type.

In operation lever 7 is lifted up and back to expose recess 11 in the block 1. Switch 23 signals the electronics

to relax the actuator 6 thus parting the halves of the block 1A and 1B. Reaction vessel 2 containing a sample for analysis and stirrer 3 is placed into recess 11 until the base of reaction vessel 2 is in contact with the ejecter plunger 21 (being in its raised position). Handle 7 is then pivoted forward bringing buffer ring 18 in contact with the rim of the reaction vessel 2. Hand pressure on lever 7 forces the vessel 2 down against the plunger 21 which retracts into the plunger body 20, until the buffer ring 18 contacts the upper surface of the blocks 1A and 1B. Switch 23 signals the electronics to close the actuator, moving block 1B against block 1A and hence slightly deforming the reaction vessel 2 in the recess 11.

In operation lever 7 is moved back to open heating chamber 1. Reaction vessel 2 containing a sample such as a weighed ground wheatmeal or starch sample is partially filled with a measured quantity of water and is then placed into the recess between the fixed portion 1(A) of heating chamber 1 and the moveable portion 1(B) of heating chamber 1. The lever system 7 is released and the mechanical actuator 6 exert a pressure on moveable portion 1(B) of heating chamber 1 causing the separated portions 1(A) and 1(B) to clamp the reaction vessel 2 firmly. As the reaction vessel 2 has relatively thin walls the clamping force is sufficient to deform the walls of the reaction vessel 2 to the shape of cylindrical recess 11. This removes any slight air gap which may be present between reaction vessel 2 and the walls of cylindrical recess 11 and promotes more efficient and rapid heating of reaction vessel 2 and hence its contents.

As the actuator 6 continues to run, the opposing faces of blocks 1A and 1B will met and then rubber spring 15

compresses. When the required compression and hence clamping force is achieved switch 16 signals the electronics to halt the actuator 6 which is self locking.

At the same time switch 23 signals the electronics to cause the motor 5 to rotate. The helical slots in the coupling at the end of motor 5 engage with pins 13 and the stirrer 3 is lifted clear of the base of the vessel 2 to remove friction between the two.

In another embodiment, a frusto conical canister is used as sample container, being forced from above into close contact with a heating block of matching shape.

Heating of the heating chamber 1 is provided by a resistance within the block and a temperature sensor may also be mounted within the heating chamber 1, the whole being thermally insulated. Heat is conducted into the sample through the walls of the reaction vessel and if the sample contains a cereal gelatinises the starch. The motor is first run at a speed of approximately 800 r.p.m. to mix the solution and suspend the particles of the mixture and then run at a slower speed of approximately 200 r.p.m. for measurement of the viscosity.

The viscosity of the sample is converted by the microprocessor (as previously described) and presented to the user as a digital result or analog signal for further display either on the digital display 8 or a chart record (not shown).

At completion of the test cycle the actuator 6 is opened releasing reaction vessel 2. Then at any convenient time for the operator the lever 7 is lifted and the reaction vessel 2 is ejected by plunger 21 to a point where the vessel can be removed completely by the operator and discarded.

As preferably stated the equipment described has application in any situation where viscosity of fluids must be determined. In particular , where viscosity at higher or lower temperatures is required, the precision obtained by the heating chamber described is especially useful. It is obviously possible and within the ambit of the present invention to fit an electronic cooler to the heating chamber to provide low temperature or heat/cooled cycle viscosities.

Finally it is to be understood that various alterations, modifications and/or additions may be introduced into the constructions and arrangements of parts previously described without departing from the spirit or ambit of the invention.

The claims defining the invention are as follows:

1. A method for measuring the viscosity of a liquid (as hereinbefore defined) at known temperatures which comprises:
 - (a) rapidly adjusting the temperature of the said liquid;
 - (b) stirring said liquid by rotating a stirring means within said liquid at a measured speed; and
 - (c) measuring the power consumed by rotating said stirring means at said speed.
2. A method as claimed in claim 1 wherein said temperature adjustment and said stirring are commenced substantially simultaneously.
3. A method as claimed in either one of claims 1 or 2 wherein said liquid is retained in a vessel and the temperature of the liquid is rapidly adjusted by bringing said vessel into contact with a heat transfer means.
4. A method as claimed in claim 3 wherein the vessel is clamped within said heat transfer means.
5. A method as claimed in claim 4 wherein said vessel is clamped tightly enough within said heat transfer means to slightly deform the walls of the vessel so that they substantially conform to the internal walls of said heat transfer means.
6. A method as claimed in any one of claims 3 to 5 wherein said heat transfer means is a metallic block adapted to accommodate said vessel.
7. A method as claimed in any one of claims 3 to 6 wherein said heat transfer means is axially split into two sections which are adapted to be brought into contact with the said vessel.
8. A method as claimed in any one of the previous

claims wherein the period of time between the commencement of said temperature adjustment of said liquid and the measurement of power consumption is measured.

9. A method as claimed in any one of the previous claims wherein the power consumption is converted by an analog to digital converter and further converted by an empirically generated table held in an electronic memory to yield a test result.

10. A method for determining the degree of sprouting in cereals (as hereinbefore defined) which comprises:

(a) preparing a cereal/water mixture of known proportions;

(b) rapidly adjusting the temperature of said mixture;

(c) stirring said mixture by rotating a stirring means at a measured speed; and

(d) measuring the power consumed by rotating said stirring means at said measured speed at a measured period of time after the commencement of said temperature adjustment.

11. A method as claimed in claim 10 wherein said water/cereal mixture has not been sufficiently mixed to form an aqueous paste prior to step (c) which also comprises initial stirring of sufficient intensity so that said mixture forms an aqueous paste prior to the measurement of the power consumption.

12. A method as claimed in either one of claims 10 or 11 wherein said temperature adjustment and said stirring are commenced substantially simultaneously.

13. A method as claimed in any one of claims 10 to 12 wherein said cereal/water mixture is retained in a vessel and the temperature of the mixture is rapidly adjusted by bringing

said vessel into contact with a heat transfer means.

14. A method as claimed in claim 13 wherein said heat transfer means is a metallic block adapted to accommodate said vessel.

15. A method as claimed in claim 14 wherein said metal block is axially split into two sections which are adapted to be brought into contact with said vessel.

16. A method as claimed in any one of claims 13 to 15 wherein said vessel is clamped tightly enough within said heat transfer means to slightly deform the walls of the vessel so that they substantially conform to the internal walls of the heat transfer means.

17. A method as claimed in any one of claims 10 to 16 wherein the power consumption is converted by an analog to digital converter and further converted by an empirically generated table held in an electronic memory to yield a test result.

18. An apparatus for measuring the viscosity of a liquid (as hereinbefore defined) which comprises:

- (a) a vessel;
- (b) a heat transfer means adapted to accommodate said vessel and capable of rapidly adjusting the temperature of its contents;
- (c) a stirring means adapted to be positioned within said vessel;
- (d) a motor suitable to drive said stirring means;
- (e) a speed controller for controlling the speed of the stirring means; and
- (f) power consumption measurement means for measuring the power consumption of the motor at any given time.

19. An apparatus as claimed in claim 18 wherein the motor is an electric motor.

20. An apparatus as claimed in either one of claims 18 or 19 wherein said heat transfer means is a metallic block adapted to accommodate said vessel.

21. An apparatus as claimed in any one of claims 18 to 20 wherein said heat transfer means is adapted to be clamped tightly around said vessel.

22. An apparatus as claimed in claim 21 wherein the heat transfer means is axially split into two sections which are adapted to be brought into contact with the vessel.

23. An apparatus as claimed in claim 22 wherein pressure applying means are provided to supply sufficient force on one or both sections of the heat transfer means to press them into contact with the vessel.

24. An apparatus as claimed in claim 23 wherein said pressure applying means is an electrically or mechanically driven mechanism which is automatically activated upon the commencement of the rotation of said stirring means.

25. An apparatus as claimed in any one of claims 18 to 24 wherein the motor is connected to the stirrer by a coupling.

26. An apparatus as claimed in claim 25 wherein the stirrer is provided with pins located at either side of the top of the said stirrer adapted to couple with helical slots located on a fixture positioned on the end of the motor shaft such that operation of the motor causes the stirrer to automatically rise and thus clear the rim of the vessel.

27. An apparatus as claimed in claim 13 wherein there is also provided a timing device which is adapted to be activated at the commencement of the said temperature adjustment.


28. An apparatus as claimed in any one of claim 18 to 27 wherein there is also provided an analog to digital converter to convert a power consumption reading to a figure which can be converted to give a test result.


29. An apparatus as claimed in any previous claim wherein the vessel is a thin walled aluminium canister.

30. An apparatus substantially as hereinbefore described with particular reference to what is shown in the drawings.

1/2

FIG 1

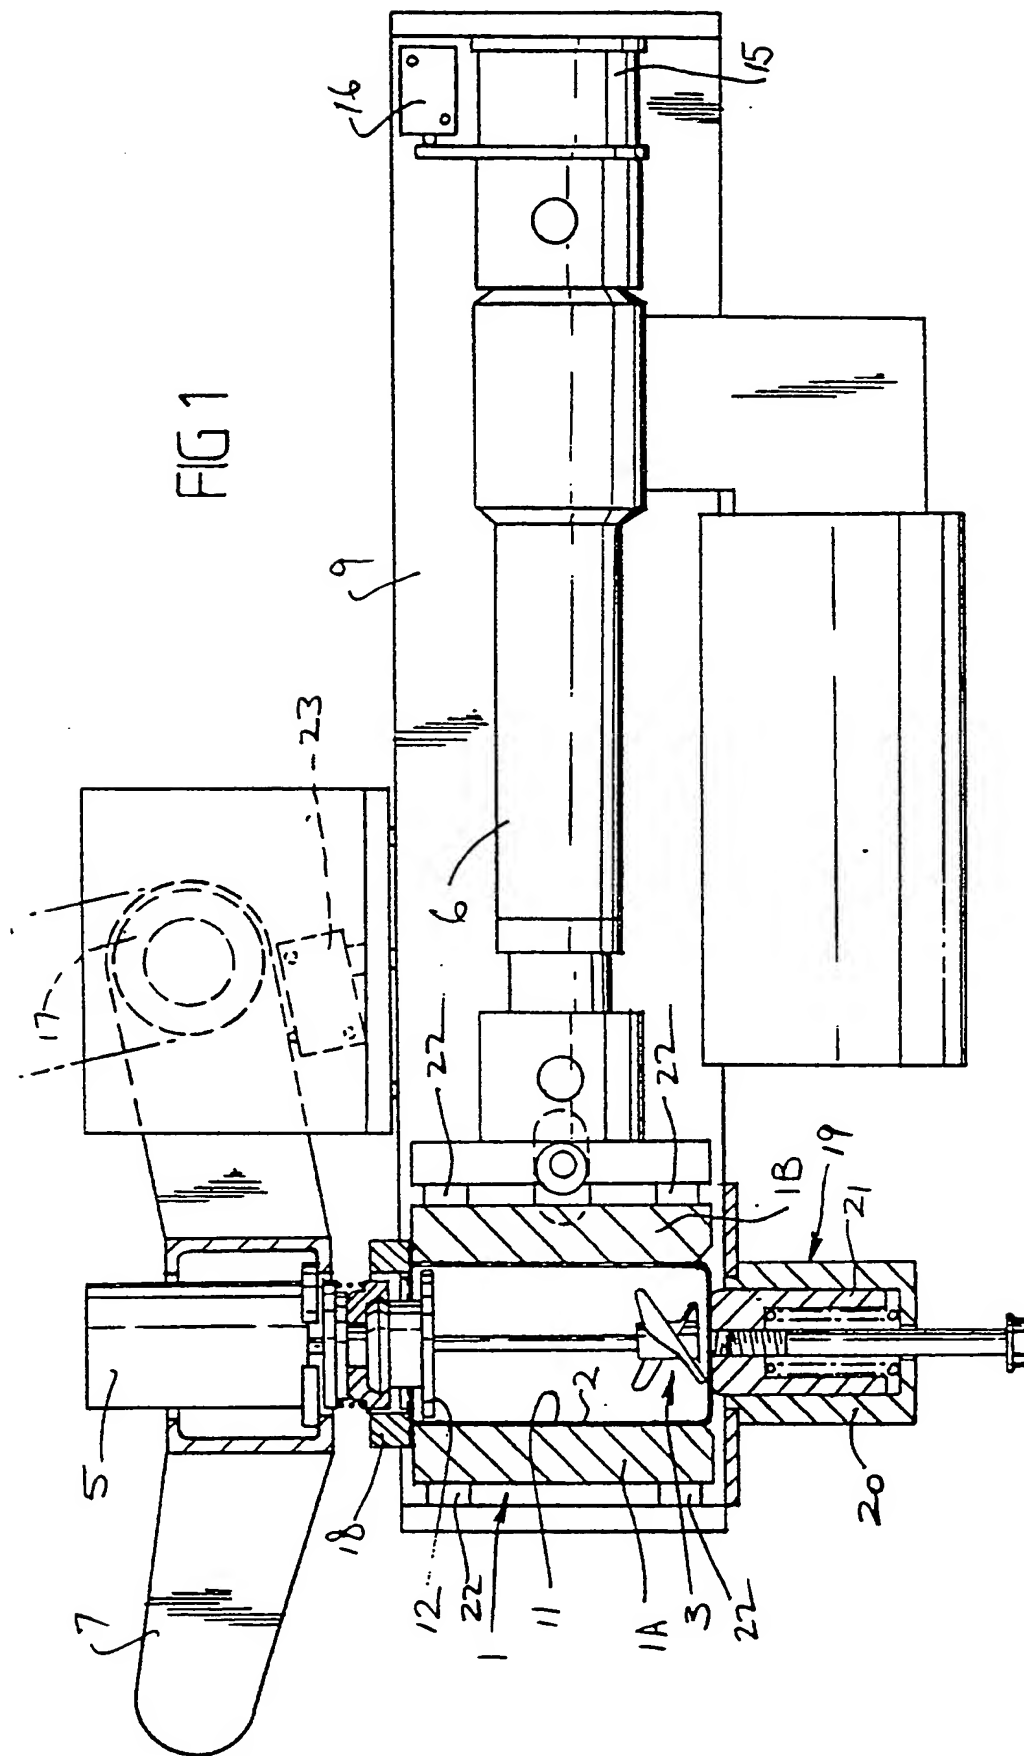

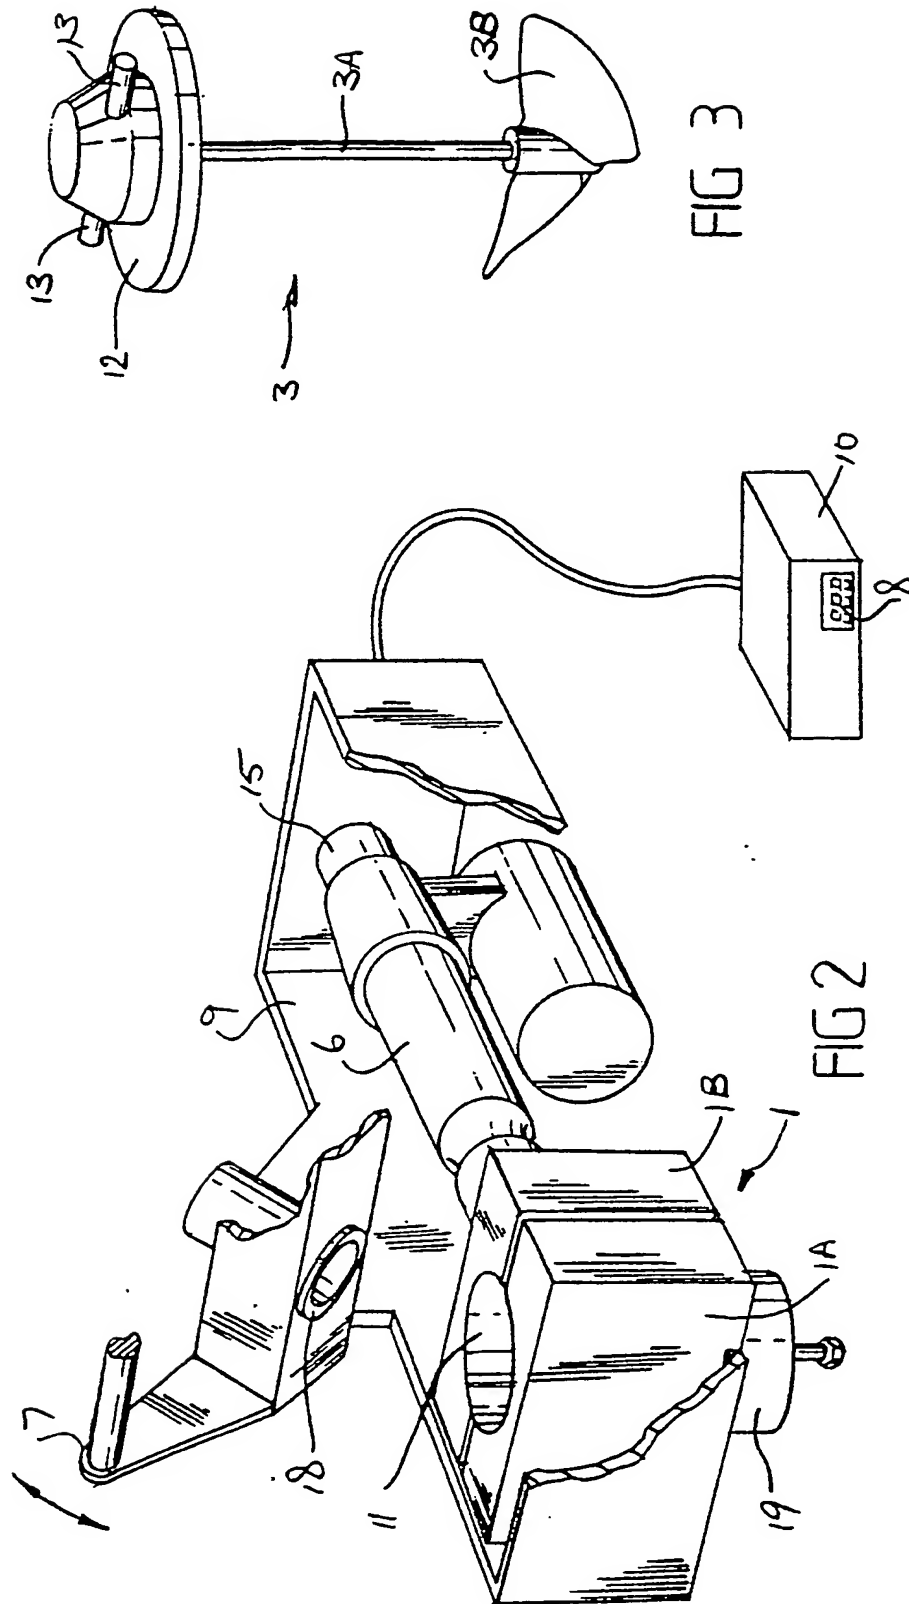

INTERNATIONAL SEARCH REPORT

International Application No. PCT/AU 86/00238

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all) According to International Patent Classification (IPC) or to both National Classification and IPC <div style="text-align: center; font-size: 1.2em;">Int. Cl.⁴ G01N 11/14, A01C 1/02</div>																
II. FIELDS SEARCHED <div style="text-align: right; font-size: 0.8em;">Minimum Documentation Searched¹</div> <table style="width: 100%; border: none;"> <tr> <td style="width: 30%; border: none;">Classification System</td> <td style="border: none;">Classification Symbols</td> </tr> <tr> <td style="border: none; text-align: center; padding: 10px 0;">IPC</td> <td style="border: none; text-align: center; padding: 10px 0;">G01N 11/10, 11/14, 11/16, A01C 1/02</td> </tr> </table> <div style="text-align: center; font-size: 0.8em; margin-top: 5px;">Documentation Searched other than Minimum Documentation to the extent that such Documents are included in the Fields Searched²</div>		Classification System	Classification Symbols	IPC	G01N 11/10, 11/14, 11/16, A01C 1/02											
Classification System	Classification Symbols															
IPC	G01N 11/10, 11/14, 11/16, A01C 1/02															
AU: IPC as above																
III. DOCUMENTS CONSIDERED TO BE RELEVANT³ <table style="width: 100%; border: none;"> <tr> <td style="width: 10%; border: none;">Category⁴</td> <td style="width: 70%; border: none;">Citation of Document, ⁵ with indication, where appropriate, of the relevant passages⁶</td> <td style="width: 20%; border: none;">Relevant to Claim No.⁷</td> </tr> <tr> <td style="border: none; text-align: center; padding: 5px 10px;">A</td> <td style="border: none; padding: 5px 10px;">US,A, 1924969 (WHEELER) 29 August 1933 (29.08.33)</td> <td style="border: none;"></td> </tr> <tr> <td style="border: none; text-align: center; padding: 5px 10px;">A</td> <td style="border: none; padding: 5px 10px;">US,A, 2660885 (EVANS) 1 December 1953 (01.12.53)</td> <td style="border: none;"></td> </tr> <tr> <td style="border: none; text-align: center; padding: 5px 10px;">A</td> <td style="border: none; padding: 5px 10px;">US,A, 4173142 (HEINZ) 6 November 1979 (06.11.79)</td> <td style="border: none;"></td> </tr> <tr> <td style="border: none; text-align: center; padding: 5px 10px;">A</td> <td style="border: none; padding: 5px 10px;">US,A, 4445365 (SELBY) 1 May 1984 (01.05.84)</td> <td style="border: none;"></td> </tr> </table>		Category ⁴	Citation of Document, ⁵ with indication, where appropriate, of the relevant passages ⁶	Relevant to Claim No. ⁷	A	US,A, 1924969 (WHEELER) 29 August 1933 (29.08.33)		A	US,A, 2660885 (EVANS) 1 December 1953 (01.12.53)		A	US,A, 4173142 (HEINZ) 6 November 1979 (06.11.79)		A	US,A, 4445365 (SELBY) 1 May 1984 (01.05.84)	
Category ⁴	Citation of Document, ⁵ with indication, where appropriate, of the relevant passages ⁶	Relevant to Claim No. ⁷														
A	US,A, 1924969 (WHEELER) 29 August 1933 (29.08.33)															
A	US,A, 2660885 (EVANS) 1 December 1953 (01.12.53)															
A	US,A, 4173142 (HEINZ) 6 November 1979 (06.11.79)															
A	US,A, 4445365 (SELBY) 1 May 1984 (01.05.84)															
<div style="display: flex; justify-content: space-between; font-size: 0.8em;"> <div style="width: 45%;"> <p>[*] Special categories of cited documents: ¹⁰</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"A" document member of the same patent family</p> </div> </div>																
IV. CERTIFICATION <table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none; vertical-align: top;"> Date of the Actual Completion of the International Search <div style="text-align: center; font-size: 1.1em;">27 October 1986 (27.10.86)</div> </td> <td style="width: 50%; border: none; vertical-align: top;"> Date of Mailing of this International Search Report <div style="text-align: center; font-size: 1.1em;">(06.11.86) 6 NOVEMBER 1986</div> </td> </tr> <tr> <td style="border: none; vertical-align: top;"> International Searching Authority <div style="text-align: center; font-size: 1.1em;">Australian Patent Office</div> </td> <td style="border: none; vertical-align: top;"> Signature of Authorized Officer <div style="text-align: center;"> D. HERALD </div> </td> </tr> </table>		Date of the Actual Completion of the International Search <div style="text-align: center; font-size: 1.1em;">27 October 1986 (27.10.86)</div>	Date of Mailing of this International Search Report <div style="text-align: center; font-size: 1.1em;">(06.11.86) 6 NOVEMBER 1986</div>	International Searching Authority <div style="text-align: center; font-size: 1.1em;">Australian Patent Office</div>	Signature of Authorized Officer <div style="text-align: center;"> D. HERALD </div>											
Date of the Actual Completion of the International Search <div style="text-align: center; font-size: 1.1em;">27 October 1986 (27.10.86)</div>	Date of Mailing of this International Search Report <div style="text-align: center; font-size: 1.1em;">(06.11.86) 6 NOVEMBER 1986</div>															
International Searching Authority <div style="text-align: center; font-size: 1.1em;">Australian Patent Office</div>	Signature of Authorized Officer <div style="text-align: center;"> D. HERALD </div>															

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.